


Automatic Jaw Sealer



Versatile Motorized Heat-Sealing

PackRite's Automatic Jaw Sealer can process single packages up to 30 items per minute. Providing either continuous-feed or intermittent stop/start sealing via foot pedal, this compact unit guarantees uniformity via automatic dwell time and pressure control for safe, consistent, and long-lasting seals. Available in two models.

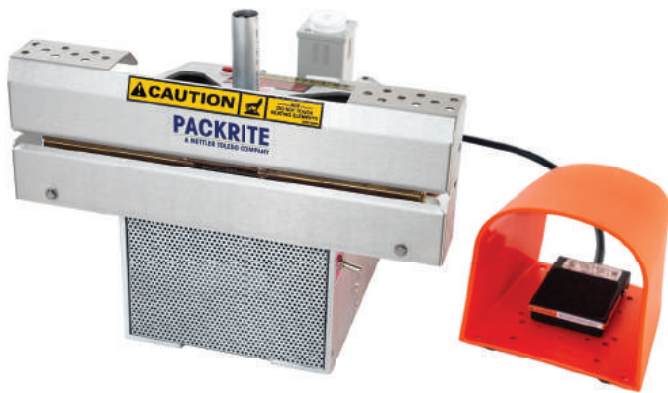

Space-Saving

When space is limited, this compact sealer fits the bill. Taking up just 7 in. by 11.5 in. of bench space, the PackRite automatic jaw sealer sits just 10 in. high when open. This small-footprint sealer can also be mounted at a 30-degree incline to take up even less space or to provide a more ergonomic sealing experience for operators.



Flexible

With both foot-pedal and automatic operation as well as dual mounting options, this flexible-use jaw sealer accommodates a variety of unsupported films up to 6 mil in thickness. With optional dwell control, this range can be extended even further while continuing to maintain seal integrity excellence and instant package release.



Intuitive

In whatever operating mode you choose, PackRite's Automatic Jaw Sealer is simple and easy to use. Requiring little training time, this dependable, robust unit can be up and running immediately after installation to start providing you with fast, efficient, and versatile sealing on day one.

Model Versions



	Thermo Motor Jaw Sealer	Poly Motor Jaw Sealer
Recommended For	Barrier material	Poly laminates and polyethylene
Sealing Capacity	Kraft, foils, polypropylene, cellophane, MIL-SPEC material	Polyethylene and other unsupported films
Seal Impressions	Horizontal crimp, flat seal, vertical crimp	Flat seal
Seal Width	1 in. *optional widths quoted on request	0.125 in., 0.375 in.
Seal Length	12 in., 15 in.	12 in., 15 in., 19 in.
Weight	37 lb.	27 lb.
Fit in to Bench Space	7 x 11.2 in.	7 x 7.25 in.
Accessories (Optional)	Embossed code dating bars (quoted upon request), universal sealer stand (powder coated metal stand), nonstick coated cover. (Used with flat seal only. Will give smoother seals on foils and some MIL-SPEC materials. Not available with embossed code dating.)	Incline mounting base (30 degrees angled toward operator), universal sealer stand (powder coated metal stand).

Shared Specifications

Sealing Speed	30 bags/minute (automatic cycling), 15 bags/minute (normal operation)
Temperature Range	Up to 500 °F
Electrical Voltage	115 V (standard)
Frequency	60 cycle
Phase	1

For more information

©09/2018 PackRite. All rights reserved

Call toll free: 1-800-248-6868 / 1-262-635-6966

Fax: 1-262-634-0521

Website: www.packrite.com

PackRite / 3026 Phillips Ave / Racine, Wisconsin 53403-3517