

Standard Jaw Sealer



Cost-Effective Pedal Sealing

Our dependable sealer gives you the durability you need for continuous, heavy-duty use along with the sensitivity required to handle a variety of materials. A simple foot pedal design provides uniform heat distribution while an adjustable thermostat permits accurate temperature control for superior seal integrity. Available in two models.




Ergonomic

The easy-to-operate PackRite Standard Jaw Sealer can be installed flat or on an incline to enhance usability and comfort. The unit's standard foot-pedal attachment has been designed with the user in mind to help prevent repetitive motion injury.



Safe

Designed to be used on heat-sealable materials up to 8 mil thick, the PackRite Standard Jaw Sealer comes with OSHA-compliant stainless-steel finger guards to protect operators from the surfaces of the unit's heating bars.

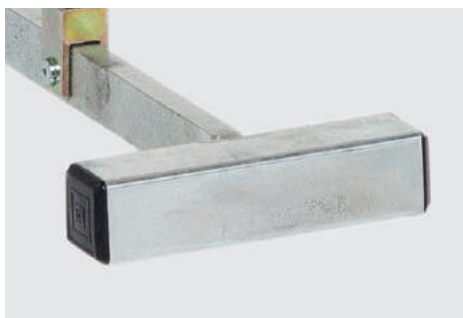

Easy-to-Use

PackRite's Standard Jaw sealer couldn't be easier to operate. Using the foot pedal, operators control pressure and dwell by how long and how hard they press. This simple design also means maintenance requirements and costs are minimized.

Model Versions



	Thermo Jaw Sealer	Poly Jaw Sealer
Recommended For	Barrier material	Poly laminates and polyethylene
Sealing Capacity	Kraft, foils, polypropylene, cellophane, MIL-SPEC material	Max. 8 mil
Seal Impressions	Horizontal crimp, flat seal, vertical crimp	Flat seal
Seal Width	1 in.	0.125 in., 0.375 in.
Seal Length	12 in., 15 in.	12 in., 15 in., 19 in.
Accessories (Optional)	Embossed code dating bars (quoted upon request), universal sealer stand (painted metal stand), Teflon® cover (Used with flat seal only. Will give smoother seals on foils and some MILSPEC materials. Not available with embossed code dating.), hole punch: 0.375 in.	Optional stand is available. All necessary mounting hardware, brackets, foot-pedal, and foot-pedal guard are standard with the Poly Jaw Sealer.

Shared Specifications

Mounts	Flat mount, incline mount (optional)
Weight	23 lb.
Temperature Range	Up to 500 °F
Electrical Voltage	115 V (standard), 230 V (optional)
Frequency	60 cycle
Phase	1

For more information

©09/2018 PackRite. All rights reserved

Call toll free: 1-800-248-6868 / 1-262-635-6966

Fax: 1-262-634-0521

Website: www.packrite.com

PackRite / 3026 Phillips Ave / Racine, Wisconsin 53403-3517